


FABRIC YIELD SYSTEMS (EUROPEAN/ISO)

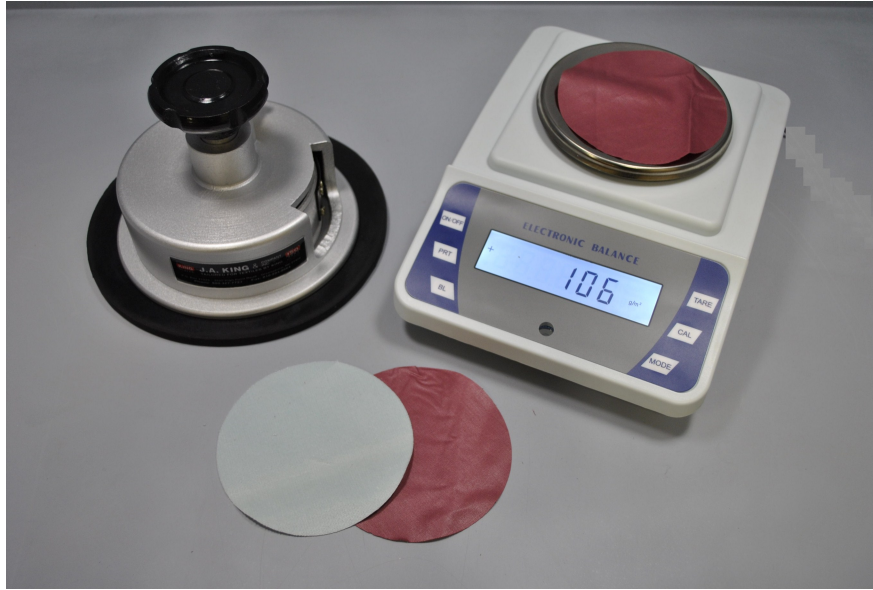

KFG-2300

European standard fabric yield system comprises a manual circular sample cutter with 4 equally spaced blades around a circumference of 4.442 inches (113 mm), producing a circular sample, of exactly 100 sq. cm area (1/100 sq. meter) with one quarter turn of the spring-loaded knob. Also provided is a portable electronic balance with a capacity of 210 grams with a precision of 0.01 grams, complete with integral draft shield. The balance is programmed to read in grams/sq. meter or ounces/sq. yard.

Supplied with 2 sided cutting pad and 12 spare blades.

KFG-2300A Manual circular sample cutter ONLY with 4 equally spaced blades around a circumference of 4.442 inches (113 mm), producing a circular sample, of exactly 100 sq. cm area (1/100 sq. meter) with one quarter turn of the spring-loaded knob. Supplied with 2 sided cutting pad and 12 spare blades.

KFG-2300B Portable electronic balance ONLY with a capacity of 210 grams with a precision of 0.01 grams, complete with integral draft shield. The balance is programmed to read in grams/sq. meter or ounces/sq. yard.

Accessories:

KFG-2301 Pack of 10 spare cutting pads.

KFG-2302 Pack of 100 spare cutting blades.